

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT		1. CONTRACT ID CODE		PAGE OF PAGES 1 3	
2. AMENDMENT/MODIFICATION NO. A001		3. EFFECTIVE DATE May 19, 2009		4. REQUISITION/PURCHASE REQ. NO.	
5. PROJECT NO. (If applicable)		6. ISSUED BY Debra Shea, Contracting Officer U.S. Embassy Panama 783 Bldg. Clayton, Panama Phone (507) 207-7399		7. ADMINISTERED BY (If other than Item 6) CODE	
8. NAME AND ADDRESS OF CONTRACTOR (NO., street,city,county,State,and ZIP Code)		9a. AMENDMENT OF SOLICITATION NO. X SPM070-09-Q-0023		9b. DATED (SEE ITEM 11) May 13, 2009	
		10a. MODIFICATION OF CONTRACT/ORDER NO.		10b. DATED (SEE ITEM 13)	
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS					
<p><input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers [] is extended, [X] is not extended</p> <p>Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copies of the amendment;(b) By acknowledging receipt of this amendment on each copy of the offer submitted; or(c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers.</p> <p>FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.</p>					
12. ACCOUNTING AND APPROPRIATION DATA (If required)					
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.					
A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.					
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b)					
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:					
D. OTHER (Specify type of modification and authority)					
E. IMPORTANT: Contractor [] is not, [] is required to sign this document and return ___ copies to the issuing office.					
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)					
The purpose of this amendment is to make three (3) revisions in the solicitation. Reference Block 11 on receipt acknowledgement.					
SEE NEXT PAGE.					
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.					
15A. NAME AND TITLE OF SIGNER (Type or print)			16A. NAME OF CONTRACTING OFFICER Debra Shea, Contracting Officer		
15B. NAME OF CONTRACTOR/OFFEROR BY _____ (Signature of person authorized to sign)		15C. DATE SIGNED	16B. UNITED STATES OF AMERICA BY _____ (Signature of Contracting Officer)		16C. DATE SIGNED

- A. Attachment # 3 Specifications is revised to read as follows:

ATTACHMENT #3 - SPECIFICATIONS


DESCRIPTION OF PROJECT

Remodeling Services will take place in the Embassy Health Unit, Rooms 130-141, and in Rooms 152 and 153, first floor, US Embassy, Panama City, Panama.

The Scope of Work refers to Attachment #2, drawings entitled “Health Unit Demolition/Relocation Plan” (Drawing 1) and Health Unit Proposed Plan” (Drawing 2), and “Partition Types” (Drawing 3), and consist of the following:

- A. Rooms 140 and 139: A section of existing wall and one door shall be removed as shown in Drawing 1. Remove all existing shelving and one sink. Items stored in these rooms shall be relocated across the hall in room 150. Construct a new wall to align with the hallway wall side of room 138 as shown in Drawing 2. Install carpet and cove base in new room 139, manufacturer and color/style to match Embassy standards. Repaint new room 139, color to match manufacturer/color/style existing in room and hallway. Relocate thermostat currently on exterior wall of room 140. **Relocate** one 120-V power outlet and install one connection block that house 4 sets of wiring – Phone, OpenNet, Internet, Network Printer. Wires should be CAT 6 in three colors – (2) Orange, (1) Blue, and (1) Green. New furnishings as depicted in Drawing 2 will be provided by the US Embassy.
- B. Room 138: Remove L-shaped section of cabinets and countertop as shown in Drawing 1. Cabinets with sink are existing to remain; repair and finish end of countertop after cutting away the L section. Patch and paint existing walls in matching color. Relocate refrigerator to corridor 130. Relocate/lower three each electrical outlets; currently located above countertops which will be removed in this project. Install one connection block that house 4 sets of wiring – Phone, OpenNet, Internet, Network Printer- Wires should be CAT 6 in three colors – (2) Orange, (1) Blue, and (1) Green for each desk. The US Embassy will provide the new desk and return as shown in Drawing 2.
- C. Room 135: Install one connection block that house 4 sets of wiring – Phone, OpenNet, Internet, Network Printer - Wires should be CAT 6 in three colors – (2) Orange, (1) Blue, and (1) Green for the additional desk. US Embassy will provide one additional desk with return; privacy partition and chair as shown in Drawing 2.
- D. Corridor 130: Remove sufficient cabinets and countertop in corridor to provide space for refrigerator (relocated from room 138) as shown in Drawing 1. Provide power and phone/alarm line in corridor for refrigerator as shown in Drawing 2. Relocate book cases to newly constructed closet.

- E. Room 152: Install new wall and door w/frame behind Cashier Station to create a closet as shown in the drawings. The door and frame removed from room 140 can and should be used for the CLO closet. Install shelving where shown in the drawing (Use the cabinets removed from room 139 & from the corridor). Items stored in room 150 are to be relocated to newly constructed Room 153B. The CLO closet (room 153B) will include independent lighting circuit with wall switch. Relocated the exit in room 152 to the center of the room and add one additional A/C exit using this exit for new room 153B. Also add ventilation slats to the new door in room 153B.
 - F. Any water line (from sinks) terminations should terminate above the ceiling. Any new enclosed space will require adequate HVAC ducting—to include return.
 - G. The new dry wall partitions for Room 139 shall be constructed in accordance with the PARTITION TYPES (Type P-1C for Room 139 & Room 152/153B) of adjacent walls. See NOB Issued for Construction Drawing Number NOB.G0.004. (Drawing 3: PARTITION TYPES). To create a closet Room 153B use (2) double ½” dry wall partitions.
- B.** Drawing #2, Proposed Plan is revised to be as follows:
See Room 138 (cabinet), Room 153B (sign was eliminated) & cabinets will be reused from the ones removed from the Health unit Offices.

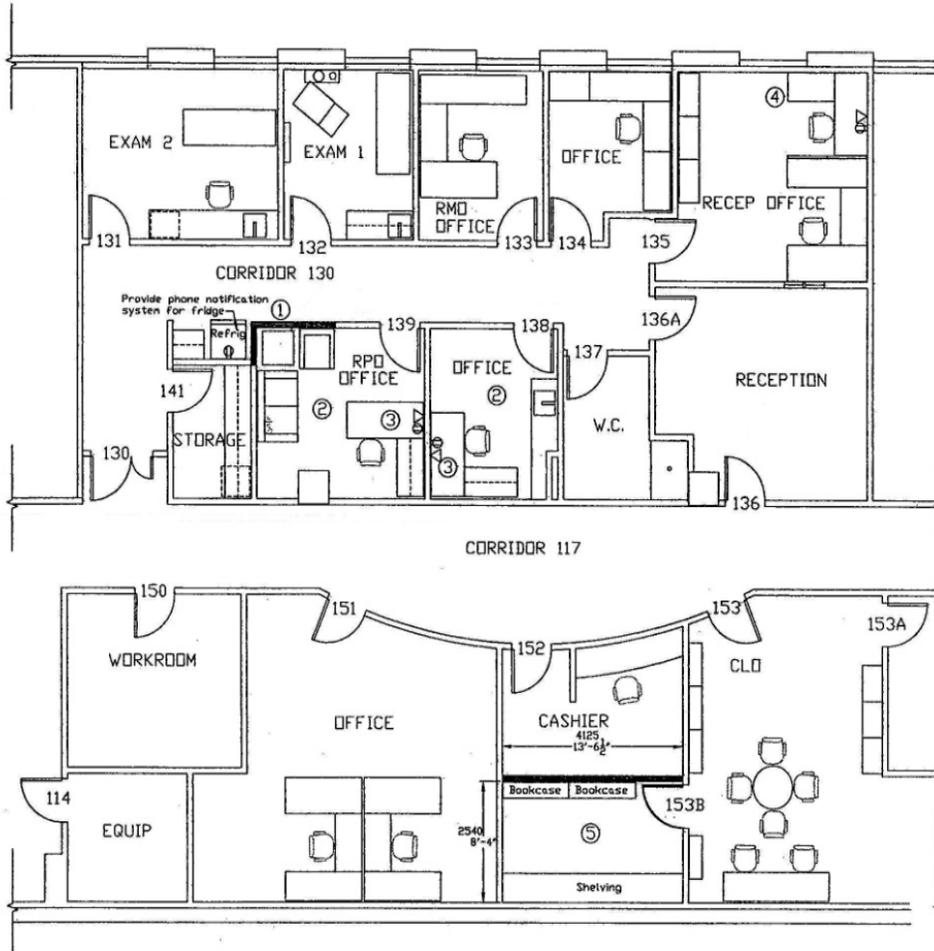

HEALTH UNIT PROPOSED PLAN

NOTES:

① Install new floor-to-ceiling drywall partition where shown, flush to existing hallway wall side of room 139. Install cove base, paint new walls to match existing color.

② Install new carpet tile and cove base in room 139; patch and paint both rooms to match existing color.

③ Install one connection block that house four sets of wiring- Phone, OpenNet, Internet, Network Printer - Wires should be CAT 6 in three colors - (2) Orange, (1) Blue, and (1) Green for each desk- rooms 138 & 139.

Relocate 120-V outlets to locations shown on the drawing.

④ Install one connection block that house four sets of wiring- Phone, OpenNet, Internet, Network Printer - Wires should be CAT 6 in three colors - (2) Orange, (1) Blue, and (1) Green for each desk- rooms 138 & 139.

⑤ Install new wall and door with frame in room 152 to create a closet. Install shelving where shown.

LEGEND:

1. Φ Install wall-mounted 120-V power outlet
2. ∇ Install wall-mounted computer data drop
3. New partition wall
4. New door and frame